



PRODOTTO PRODUCT	Vin (VCC) Vin (VCC)	LUMEN LUMEN	ANGOLO ANGLE	COLORE COLOUR	WATT WATT	LUNGHEZZA (mm) LENGHT (mm)
86.173	24	840	12°	RGB	24	500
86.174	24	1440	12°	BIANCO FREDDO (5000-6000K)	24	500
86.175	24	1260	12°	BIANCO CALDO (2700-3200K)	24	500
86.176	24	840	30°	RGB	24	500
86.177	24	1440	30°	BIANCO FREDDO (5000-6000K)	24	500
86.178	24	1260	30°	BIANCO CALDO (2700-3200K)	24	500
86.179	24	840	60°	RGB	24	500
86.180	24	1440	60°	BIANCO FREDDO (5000-6000K)	24	500
86.181	24	1260	60°	BIANCO CALDO (2700-3200K)	24	500
86.182	24	1680	12°	RGB	48	1000
86.183	24	2880	12°	BIANCO FREDDO (5000-6000K)	48	1000
86.184	24	2520	12°	BIANCO CALDO (2700-3200K)	48	1000
86.185	24	1680	30°	RGB	48	1000
86.186	24	2880	30°	BIANCO FREDDO (5000-6000K)	48	1000
86.187	24	2520	30°	BIANCO CALDO (2700-3200K)	48	1000
86.188	24	1680	60°	RGB	48	1000
86.189	24	2880	60°	BIANCO FREDDO (5000-6000K)	48	1000
86.190	24	2520	60°	BIANCO CALDO (2700-3200K)	48	1000

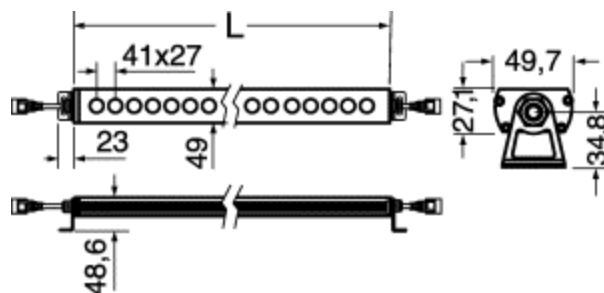

86.191

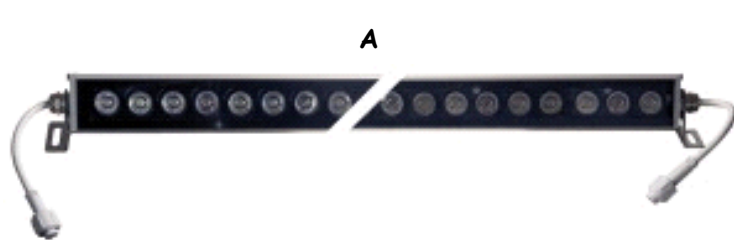

Controller Wireless IP66
Wireless controller IP66

86.192



Amplificatore di segnale IP66
Signal amplifier IP66

86.193 (60W) e 86.194 (150W)



Alimentatore per wallwasher IP66
Wallwasher power supply IP66

86.194



Cavo interconnessione
per wallwasher IP66

Wallwasher cable
connection IP66

Ta -40°C ÷ +40°C



Cavo di rete IP66 per
alimentatori wallwasher
86.193-86.194
Cable IP66 for power
supply 86.193-86.194

86.195

