


LED

MODULI STANDARD UTILIZZABILI PER SVARIATE APPLICAZIONI A SECONDA DELLE NECESSITA' DI FORMA, POTENZA E LUCE RICHIESTA. DISPONIBILITA' DI DISSIPATORI E LENTI.

STANDARD MODULES FOR MANY APPLICATION. DIFFERENT FORM, POWER AND DEMANDED LIGHT. DISPOSABLE OF LENS AND DISSIPATORS.

Ø 22




COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0063/BI2700	0,35-0,7	WHITE 2700°k	1-2	85	105 (350mA) - 180 (700mA)
Q0063/BI3000	0,35-0,7	WHITE 3000°k	1-2	85	110 (350mA) - 190 (700mA)
Q0063/BI4000	0,35-0,7	WHITE 4000°k	1-2	80	120 (350mA) - 200 (700mA)
Q0063/BI5000	0,35-0,7	WHITE 5000°k	1-2	80	130 (350mA) - 220 (700mA)

Disponibile con Circuito stampato ALLUMINIO (serie Q0137/... Disposable with ALLUMINIUM PCB (series Q0137/...))

Disponibilità di lenti 10°-25°-40°-ellittiche-side emitting - Disposable lens 10°-25°-40°-elliptical-side

Ø46mm

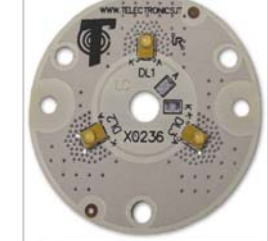

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0075/BI2700	0,35-0,7	WHITE 2700°k	3-6	85	315 (350mA) - 540 (700mA)
Q0075/BI3000	0,35-0,7	WHITE 3000°k	3-6	85	330 (350mA) - 570 (700mA)
Q0075/BI4000	0,35-0,7	WHITE 4000°k	3-6	80	360 (350mA) - 600 (700mA)
Q0075/BI5000	0,35-0,7	WHITE 5000°k	3-6	80	390 (350mA) - 660 (700mA)

Disponibile con Circuito stampato ALLUMINIO (serie Q0117/... Disposable with ALLUMINIUM PCB (series Q0117/...))

Disponibilità di lenti 25°-40° - Disposable lens 25°-40°




ALLUMINIUM PCB

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	PZ IMBALLO CARTON QTY
Q0069/RGB (fig.1)	0,35	RGB	3	54
Q0070/RGB (fig.2)	0,35	RGB	6	20



Ø 46 mm
ALLUMINIUM PCB

38x12mm

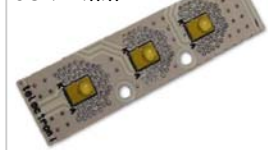


ALLUMINIUM PCB

COD. PRODOTTO PRODUCT CODE	I(A),Vin I(A),Vin	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0076/BI2700	0,35-0,7	WHITE 2700°k	3-6	85	315 (350mA) - 540 (700mA)
Q0076/BI3000	0,35-0,7	WHITE 3000°k	3-6	85	330 (350mA) - 570 (700mA)
Q0076/BI4000	0,35-0,7	WHITE 4000°k	3-6	80	360 (350mA) - 600 (700mA)
Q0076/BI5000	0,35-0,7	WHITE 5000°k	3-6	80	390 (350mA) - 660 (700mA)

Disponibilità di lenti 10°-25°-40°-ellittiche - Disposable lens 10°-25°-40°-elliptical

46x46mm




COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0078/BI2700	0,35-0,7	WHITE 2700°k	7-14	85	735 (350mA) - 1260 (700mA)
Q0078/BI3000	0,35-0,7	WHITE 3000°k	7-14	85	770 (350mA) - 1330 (700mA)
Q0078/BI4000	0,35-0,7	WHITE 4000°k	7-14	70	840 (350mA) - 1400 (700mA)
Q0078/BI5000	0,35-0,7	WHITE 5000°k	7-14	70	910 (350mA) - 1540 (700mA)

Disponibilità di lenti 10°-25°-40°-ellittiche - Disposable lens 10°-25°-40°-elliptical

MADE IN ITALY


LED



Ø 46mm

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0079/BI2700	0,35-0,7	WHITE 2700°k	7-14	85	735 (350mA) - 1260 (700mA)
Q0079/BI3000	0,35-0,7	WHITE 3000°k	7-14	85	770 (350mA) - 1330 (700mA)
Q0079/BI4000	0,35-0,7	WHITE 4000°k	7-14	80	840 (350mA) - 1400 (700mA)
Q0079/BI5000	0,35-0,7	WHITE 5000°k	7-14	80	910 (350mA) - 1540 (700mA)

Disponibile con Circuito stampato ALLUMINIO
Disponibilità di lenti 10°-25°-40° - *Disponable lens 10°-25°-40°*



Ø 92mm

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0080/BI2700	0,35-0,7	WHITE 2700°k	9-18	85	945 (350mA) - 1620 (700mA)
Q0080/BI3000	0,35-0,7	WHITE 3000°k	9-18	85	990 (350mA) - 1710 (700mA)
Q0080/BI4000	0,35-0,7	WHITE 4000°k	9-18	80	1080 (350mA) - 1800 (700mA)
Q0080/BI5000	0,35-0,7	WHITE 5000°k	9-18	80	1170 (350mA) - 1980 (700mA)

Disponibile con Circuito stampato ALLUMINIO
Disponibilità di lenti 10°-25°-40° - *Disponable lens 10°-25°-40°*



Ø 50mm

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0130/BI2700	0,35-0,7	WHITE 2700°k	3,5-7	85	450 (350mA) - 900 (700mA)
Q0130/BI3000	0,35-0,7	WHITE 3000°k	3,5-7	85	475 (350mA) - 950 (700mA)
Q0130/BI4000	0,35-0,7	WHITE 4000°k	3,5-7	80	500 (350mA) - 1000 (700mA)

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0140/BI2700	0,35-0,7	WHITE 2700°k	7,5-15	85	1050 (350mA) - 2100 (700mA)
Q0140/BI3000	0,35-0,7	WHITE 3000°k	7,5-15	85	1100 (350mA) - 2200 (700mA)
Q0140/BI4000	0,35-0,7	WHITE 4000°k	7,5-15	80	1130 (350mA) - 2260 (700mA)



180x24mm

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0141/BI2700	0,35-0,7	WHITE 2700°k	7,5-15	85	1050 (350mA) - 2100 (700mA)
Q0141/BI3000	0,35-0,7	WHITE 3000°k	7,5-15	85	1100 (350mA) - 2200 (700mA)
Q0141/BI4000	0,35-0,7	WHITE 4000°k	7,5-15	80	1130 (350mA) - 2260 (700mA)



249x24mm

MADE IN ITALY

LED



Ø 62mm

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0148/BI2700	0,35-0,7	WHITE 2700°k	3,5-7	85	450 (350mA) - 900 (700mA)
Q0148/BI3000	0,35-0,7	WHITE 3000°k	3,5-7	85	475 (350mA) - 950 (700mA)
Q0148/BI4000	0,35-0,7	WHITE 4000°k	3,5-7	80	500 (350mA) - 1000 (700mA)



Ø 95mm


COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0148/BI2700	0,50-0,7	WHITE 2700°k	11-15	85	1550 (500mA) - 2100 (700mA)
Q0148/BI3000	0,50-0,7	WHITE 3000°k	11-15	85	1600 (500mA) - 2150 (700mA)
Q0148/BI4000	0,50-0,7	WHITE 4000°k	11-15	80	1650 (500mA) - 2200 (700mA)

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0243/BI2700	0,35	WHITE 2700°k	15	85	2000 (350mA)
Q0243/BI3000	0,35	WHITE 3000°k	15	85	2100 (350mA)
Q0243/BI4000	0,35	WHITE 4000°k	15	80	2200 (350mA)




278X20mm

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0247/BI2700	0,35-0,7	WHITE 2700°k	6,5-13	85	900 (350mA) - 1800 (700mA)
Q0247/BI3000	0,35-0,7	WHITE 3000°k	6,5-13	85	925 (350mA) - 1850 (700mA)
Q0247/BI4000	0,35-0,7	WHITE 4000°k	6,5-13	80	950 (350mA) - 1900 (700mA)

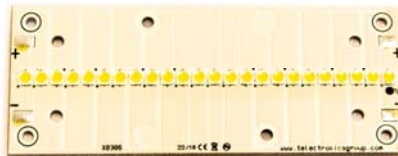

100x40mm

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0248/BI2700	0,50-0,7	WHITE 2700°k	11-15	85	1550 (500mA) - 2100 (700mA)
Q0248/BI3000	0,50-0,7	WHITE 3000°k	11-15	85	1600 (500mA) - 2150 (700mA)
Q0248/BI4000	0,50-0,7	WHITE 4000°k	11-15	80	1650 (500mA) - 2200 (700mA)

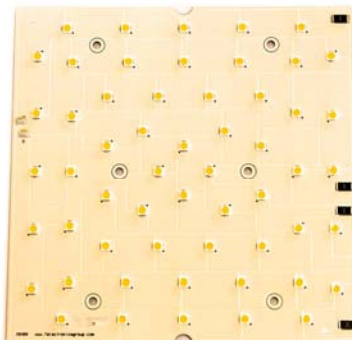

134x134mm

MADE IN ITALY

LED

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0254/BI2700	0,35-0,7	WHITE 2700°k	6,5-13	85	900 (350mA) - 1800 (700mA)
Q0254/BI3000	0,35-0,7	WHITE 3000°k	6,5-13	85	925 (350mA) - 1850 (700mA)
Q0254/BI4000	0,35-0,7	WHITE 4000°k	6,5-13	80	950 (350mA) - 1900 (700mA)



284x24mm



Ø 50mm


COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0282/BI2700	0,35-0,7	WHITE 2700°k	6,5-12,5	85	900 (350mA) - 1800 (700mA)
Q0282/BI3000	0,35-0,7	WHITE 3000°k	6,5-12,5	85	950 (350mA) - 1900 (700mA)
Q0282/BI4000	0,35-0,7	WHITE 4000°k	6,5-12,5	80	980 (350mA) - 1960 (700mA)



Ø 95mm

COD. PRODOTTO PRODUCT CODE	I (A) I (A)	COLORE COLOUR	W W	TYP CRI TYP CRI	TYP FLUX (lm) TYP FLUX (lm)
Q0298/BI2700	0,50-0,7	WHITE 2700°k	11-15	85	1550 (500mA) - 2100 (700mA)
Q0298/BI3000	0,50-0,7	WHITE 3000°k	11-15	85	1600 (500mA) - 2150 (700mA)
Q0298/BI4000	0,50-0,7	WHITE 4000°k	11-15	80	1650 (500mA) - 2200 (700mA)

PROGETTAZIONE MODULI LED DI POTENZA CON MISURE A RICHIESTA
POWER LED MODULE PROJECT (CUSTOM PRODUCT DIMENSION)

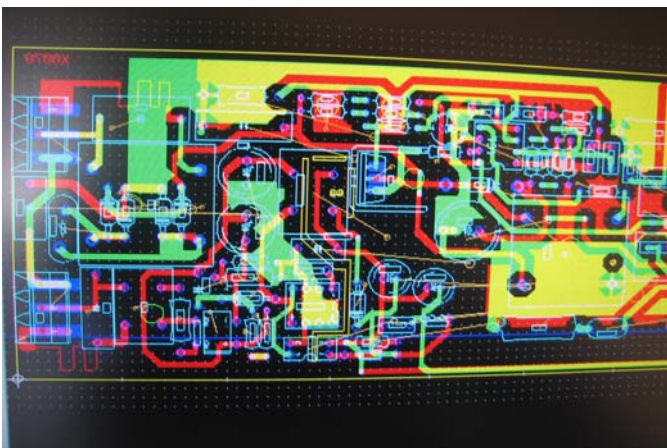

MADE IN ITALY